


# Tanning Lamp - Data Sheet


**megaTrend pureSunlight 10 0 25 W C 52**

**25-O-10/3,1**

KBL part.-No. 3230076269  
 Dimensions 525 x 15 mm  
 Base G13 Bi-Pin

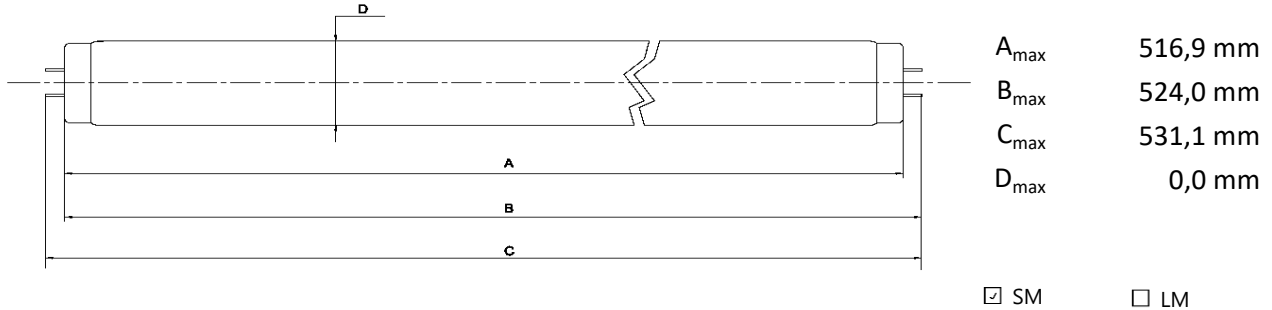

## Relative Spectral Distribution

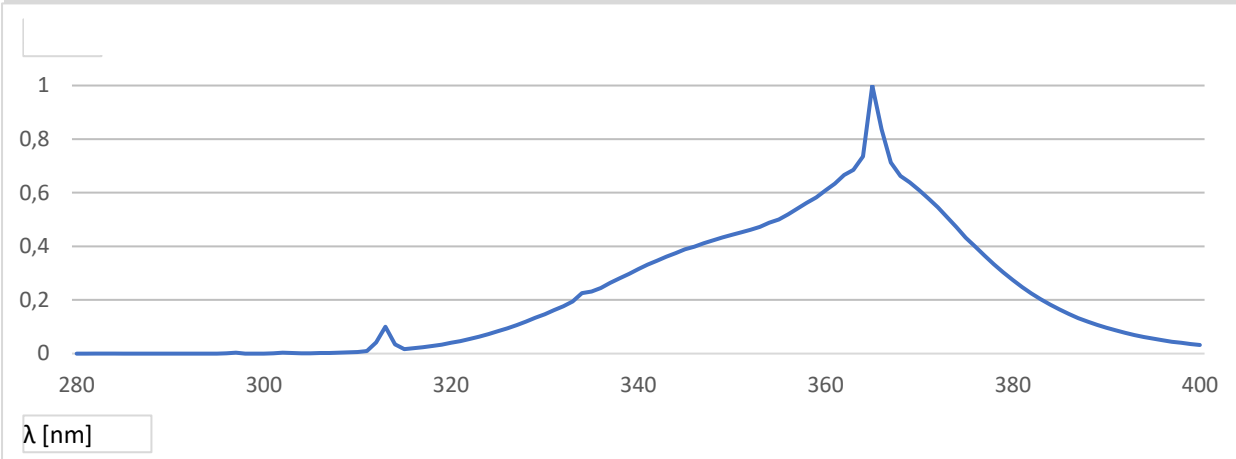

## Electrical Data (nominal values)

Lamp Wattage	25 W	Lamp Voltage	66 V
Lamp Current	0,43 A	Ballast	25 W

## Physical Data (nominal values)

UVA Radiation Flux	6 W	E <sub>er</sub> (250-400 nm)	9,0 mW/m <sup>2</sup>
UVB/UVA Ratio		E <sub>er</sub> (320-400 nm)	4,0 mW/m <sup>2</sup>
EUR (UVB 280-315)	0,9 %	E <sub>er</sub> (250-320 nm)	5,0 mW/m <sup>2</sup>
USA (UVB 260-320)	1,4 %	NMSC Ratio (≤320/>320nm)	2,7
		Useful life (recommended)	500 h

## Recommended Exposure Times

Start Time *	5,2 min	TE*	24,5 min
Max. Time for Skin Type II*	13,0 min	TM*	65,5 min
Max. Time for Skin Type III*	18,3 min		
Max. Time for Skin Type IV*	23,5 min		

\*For a typical irradiance in a bed of 230 W/m<sup>2</sup>  
 These results will vary depending on the size  
 and type of bed the lamp is installed