


# Tanning Lamp - Data Sheet

**pureSunlight 1928 R 180W**

**180-R-32/2,1**


KBL part.-No. 3230076306  
 Dimensions 1900 x 38 mm  
 Base G13 Bi-Pin

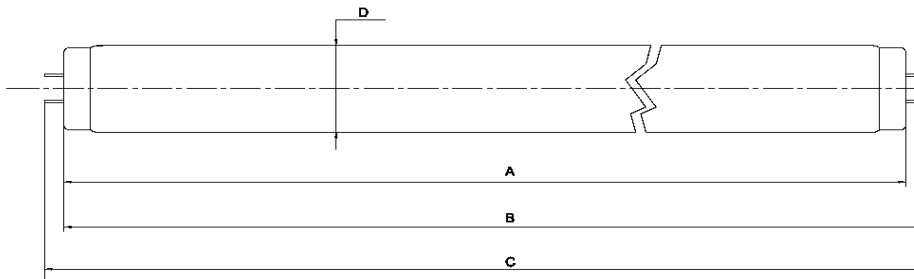

$A_{max}$  1901,3 mm  
 $B_{max}$  1908,4 mm  
 $C_{max}$  1915,5 mm  
 $D_{max}$  40,4 mm

SM  LM

## Relative Spectral Distribution

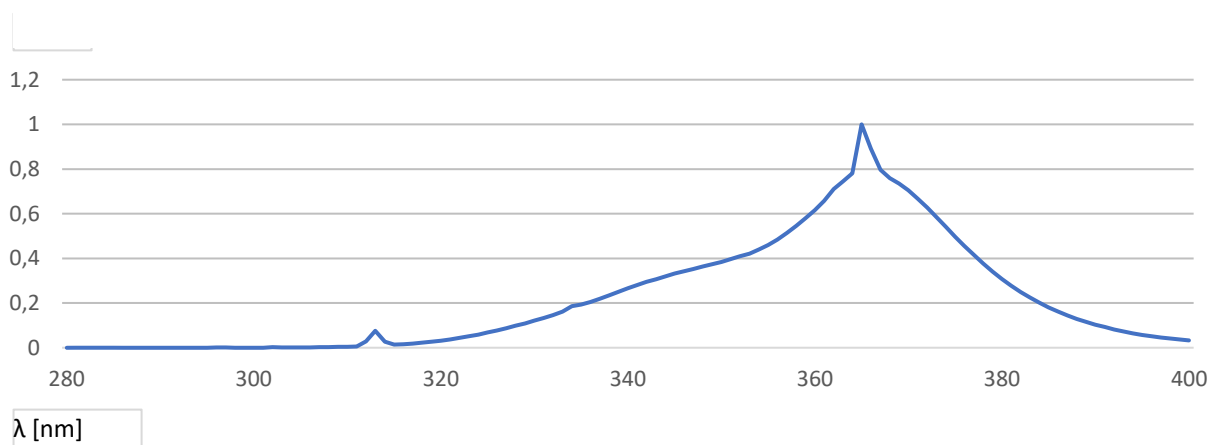

## Electrical Data (nominal values)

Lamp Wattage	180 W	Lamp Voltage	103 V
Lamp Current	1,95 A	Ballast	180 W

## Physical Data (nominal values)

UVA Radiation Flux	45 W	E <sub>er</sub> (250-400 nm)	32,3 mW/m <sup>2</sup>
UVB/UVA Ratio		E <sub>er</sub> (320-400 nm)	16,5 mW/m <sup>2</sup>
EUR (UVB 280-315)	0,6 %	E <sub>er</sub> (250-320 nm)	15,8 mW/m <sup>2</sup>
USA (UVB 260-320)	1,1 %	NMSC Ratio (≤320/>320nm)	2,1
		Useful life (recommended)	800 h

## Recommended Exposure Times

Start Time *	3,2 min	TE*	15,4 min
Max. Time for Skin Type II*	8,1 min	TM*	40,4 min
Max. Time for Skin Type III*	11,4 min		
Max. Time for Skin Type IV*	14,6 min		

\*For a typical irradiance in a bed of 450 W/m<sup>2</sup>

These results will vary depending on the size and type of bed the lamp is installed